


ANTCOM CORPORATION, 367 Van Ness Way, Suite 602, Torrance, CA 90501, Tel: (310) 782-1076, Fax: (310) 782-1086, E-mail: antennas@antcom.com, <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO YOU IS EXPRESSLY FORBIDDEN UNLESS YOU AGREE THAT ITS USE IS LIMITED TO USE WITH YOUR COMPANY ONLY AND DOES NOT INCLUDE MANUFACTURE OR PRODUCTION. ANY OTHER USE IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF ANTCOM CORP.

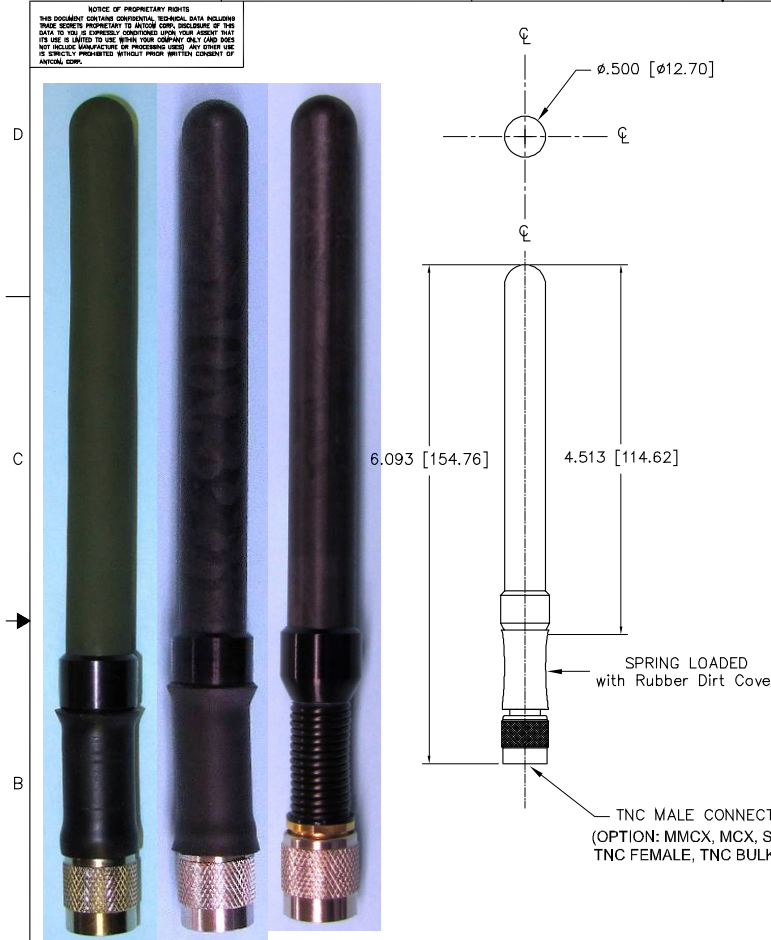

OPTIONAL SPRING LOADED ADAPTER:
P/N: TNC-M-SL-2in-TNC-F

SPECIFICATIONS		REVISIONS			
ZONE	REV	DESCRIPTION	DATE	APPROVED	
A	U	Ultrem 2200 Black (20% Class)	Aug-10-10	S.H.	
B		SPRING LOADED BASE	NOV-20-10	S.H.	
C		One piece Bottom Cable	Dec-18-10	S.H.	
D		Cable Loop In Spring	Dec-20-10	S.H.	
E		With Dirt Cover	Feb-01-11	S.H.	

FREQUENCY (MHz):	(1575.42 ±15)	(1542.50 ±17.5)	(1642.50 ±17.5)	(1602-1616)	(1610-1626)
GAIN in FS/3in GP (dBiC)	L1 GPS	Rx INMARSAT	Tx INMARSAT	GLONASS	IRIDIUM
@ 90° (Zenith):	-1.6	-2.9	+0.1	+0.5	+0.5
@ 10° Elevation:	-4.5	-6.0	-2.1	-2.0	-2.0
@ 20° Elevation:	-3.5	-5.0	-1.1	-0.9	-0.9
@ 30° Elevation:	-2.8	-4.2	-0.7	-0.3	-0.3
@ 45° Elevation:	-2.3	-3.5	-0.2	+0.3	+0.3
@ 70° Elevation:	-1.8	-3.0	-0.4	+0.2	+0.2
BEAM WIDTH (3dB)	152 Deg.	150 Deg.	170 Deg.		160 Deg.
AXIAL RATIO (dB)	1 to 3	1 to 3	1 to 3	1 to 3	1 to 3
RADIATION PATTERN:	HEMISPHERICAL				
POLARIZATION:	RHCP				
VSWR:	< 2.0:1				

LNA OPTION for GPS:
 LNA GAIN: (27.0+/-2.0) dB
 LNA NOISE FIGURE: <1.4 dB
 LNA P 1dB Out: +13 dBm
 VOLTAGE/CURRENT: (3-10) Volts/ 20mA

MECHANICAL:
 SIZE: DIAMETER: 0.50 in. [12.70 mm]
 HEIGHT: 6.01 in. [153 mm]
 WEIGHT: 1.3 oz (37 g)
 FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL, BLACK ANODIZING (MIL-A-8625F, Type II Class II)
 COLOR: See Below Description
 MATERIAL: 6061-T6 ALUMINUM ALLOY BASE COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT, SKYDROL RESISTANCE, AND FIRE RETARDANT
 CONNECTOR: TNC MALE (OPTION: MMCX, MCX, SMP, SSMC, SMA, BNC TNC FEMALE, TNC-BULKHEAD, N, N-BULKHEAD, or Cable)

ENVIRONMENTAL:
 TEMPERATURE: -67 °F TO +185 °F [-55 °C TO +85 °C]
 ALTITUDE: 70,000 ft.
 VIBRATION: > 30 G's
 LEAKAGE: HERMETICALLY SEALED

FEDERAL & MILITARY SPECIFICATIONS:
DESIGN TO: FAA TSO-C144, DO-160D, D0-228, MIL-A-8625F, MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455
ACCEPTANCE TEST PROCEDURE: ATP-GPS-L1L2-100

CONFIGURATION:	FREQUENCY:	LNA:	CABLE'S LENGTH:	FEMALE CONNECTOR:	COLOR:
1: 2" SQ. (FLAT)	1215: L1/L2/Inmarsat	A1: WITH LNA	X: NO CABLE	S: SMA; P: PINS	-1: GLOSS WHITE #17925 PER FED-STD-595B
1.9: 1.9" SQ. (FLAT)	1215: L1/L2		M: WITH MAG. MOUNT	M: MCX; MM: MMCX	-2: LUSTERLESS GREEN #36320 PER FED-STD-595B
2: 2.8" DIA. (FLAT)	15: L1	P: WITHOUT LNA	R: CABLE LENGTH (IN)	SMP, SSMC; B: BNC	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B
3: 3.6" DIA. (FLAT)	RR: TX: RHCP, RX: RHCP		R: RIGHT ANGLE CON.	T: TNC; TB: TNC-Bulkhead	-4: Natural Back Color from Ultrem 2200 Black (20% Glass)
0.5R: 0.5" DIA. RHCP HELIX				TM: TNC MALE	-5: Desert Tan
0.5T: 0.5" DIA. LHCP HELIX				N: N; NB: N-Bulkhead	
S3: (HELIX ROD)					
S8: (HELIX BLADE)					
3D: (HELIX HANDHELD)					

P/N: 0.5R1216P-XTM-4-SL

NOTES: UNLESS OTHERWISE SPECIFIED:
 1. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS [mm]
 2. ALL SCREWS ARE SUPPLIED BY ANTCOM CORPORATION

QUANTITY	REQD	DESCRIPTION	PART NO	MATERIAL	FINISH	REV
1	1		-	-	-	1
-2	-1					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ANTCOM CORP. TORRANCE CALIFORNIA	
FRACTIONS	DECIMALS	DATE	SCALE
± 1/64	± .015	2013-02-23	1/1
ANGLES	± 1'	DRAWN	DESIGNED
TOLERANCE SURF PER ANS Y14.5	PER ANS Y14.5	APPROVED	CHECKED
REMOVE ALL BURRS	BREAK EXTERNAL EDGES TO .015	S. HUYNH	
FILED IN SIZE TO E	DRY S. HUYNH	Feb-23-04	
SCREW TORQUES PER MIL-S-8879	DATE ON A COMMON S. HUYNH		
27.005	MACHINED SURFACES		
DO NOT SCALE DRAWING			