




P/N: 4G1215A1003-2C-3LG5 Rev K, Item 168LG5-2C  
 (4G 3L Active G5 2 Connectors Base Plate)



DFARS 252-225-7014, Passivated; Chem. Film (MIL-C-5541F, Class 1A); Anodizing (MIL-A-8625F, Type II Class II)

All 0-80 Threads needed to be >10 threads (0.125in deep) if possible, 0.093in Radius on Labels

ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . http://www.antcom.com

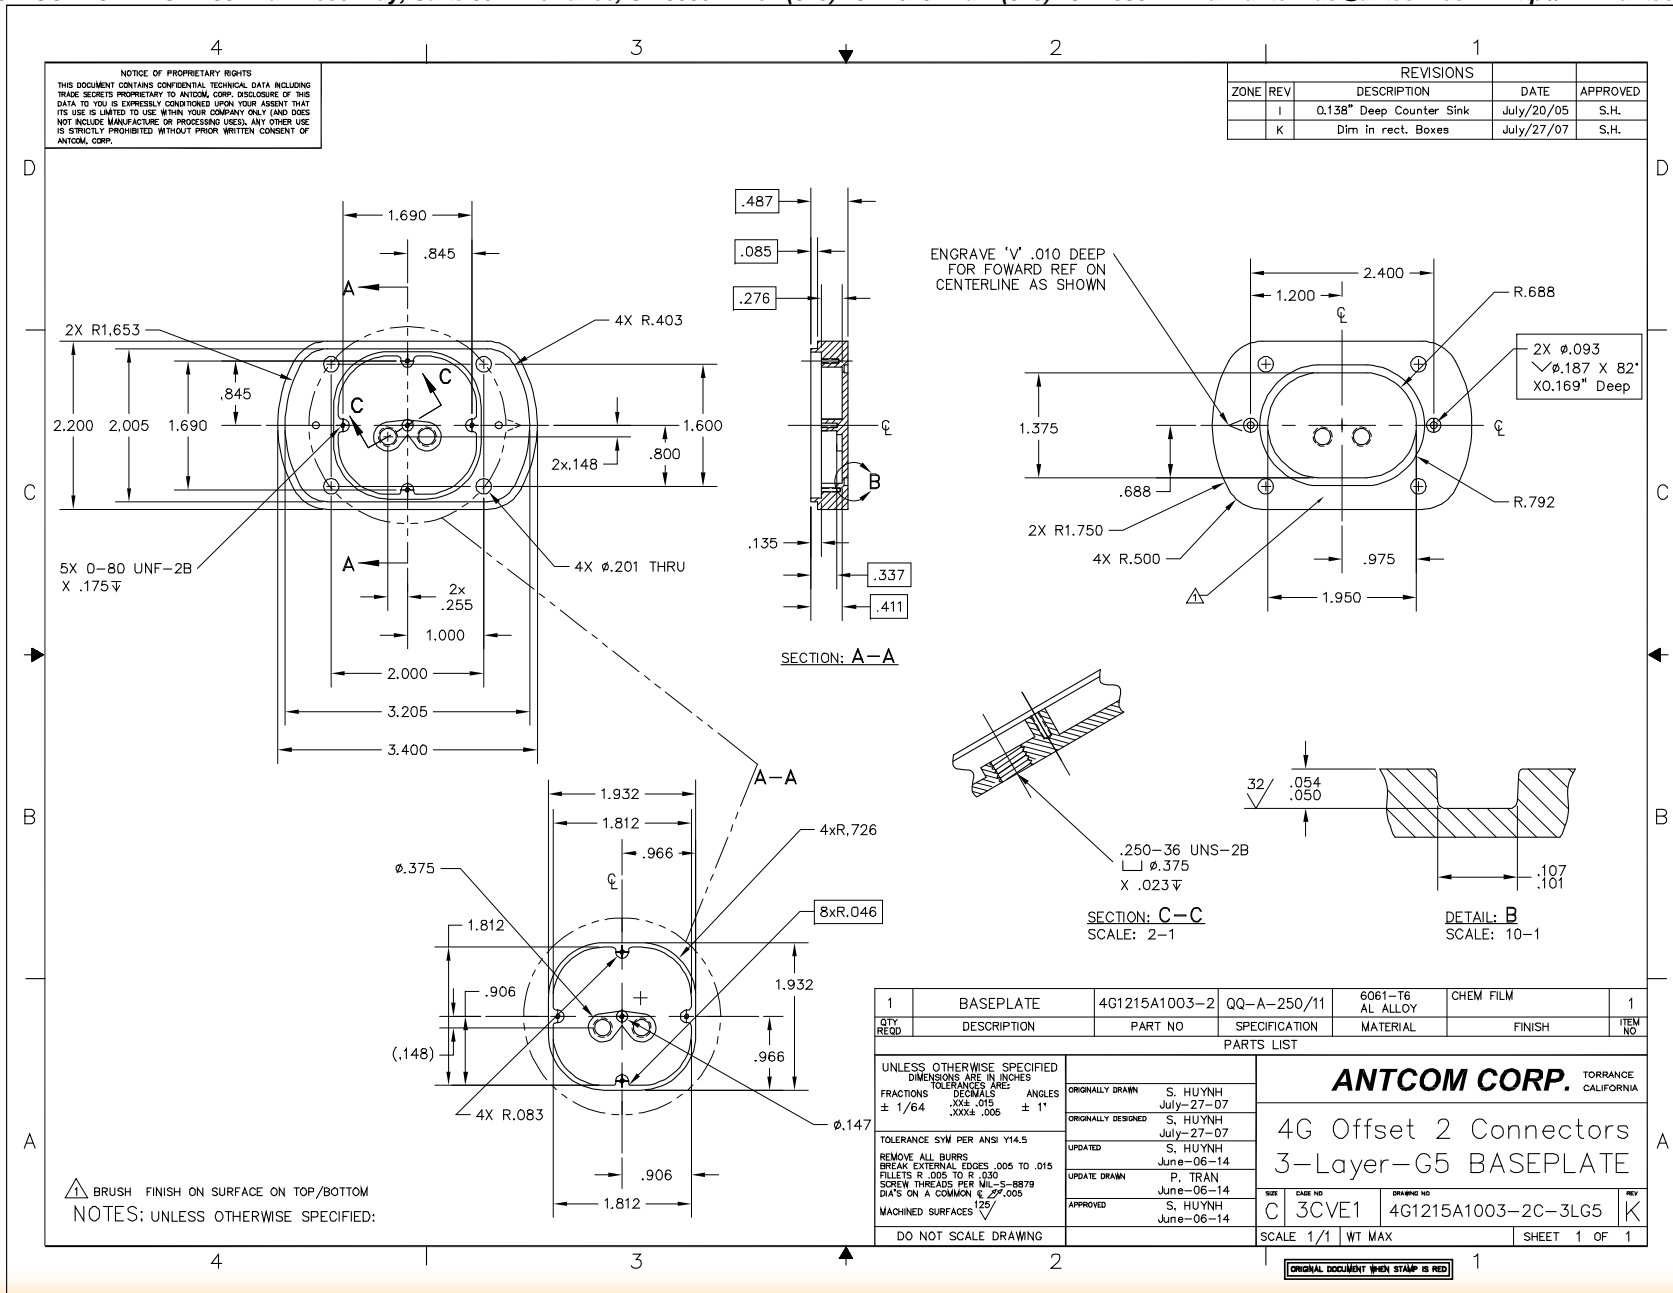

Hysoyl for All 0-80 Screws. No RTV on the other side.