



FAA Approved Facility

Iridium/Inmarsat/L1/L2 GPS/Glonass/L-Band (1-2 GHz) Helix Antenna

P/N: 18x2.5H1215R-P-XS-1





2.5" Diameter x 18" Tall, Front/Back Mount Configuration, *for Space Applications*
with SMA, TNC, N, or BNC Connector Options

Antenna Mounts: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>



ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

NOTICE OF PROPRIETARY RIGHTS
THIS DOCUMENT CONTAINS CONFIDENTIAL, TECHNICAL DATA INCLUDING TRADE SECRETS PROPRIETARY TO ANTCOM CORP. DISCLOSURE OF THIS DATA TO ANY OTHER ENTITY WITHOUT WRITTEN CONSENT OF ANTCOM CORP. IS STRICTLY PROHIBITED WITHOUT WRITTEN CONSENT OF ANTCOM CORP.

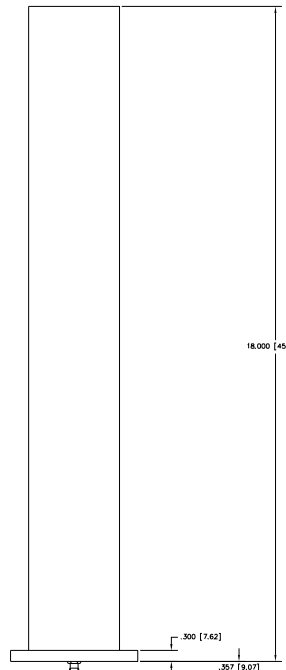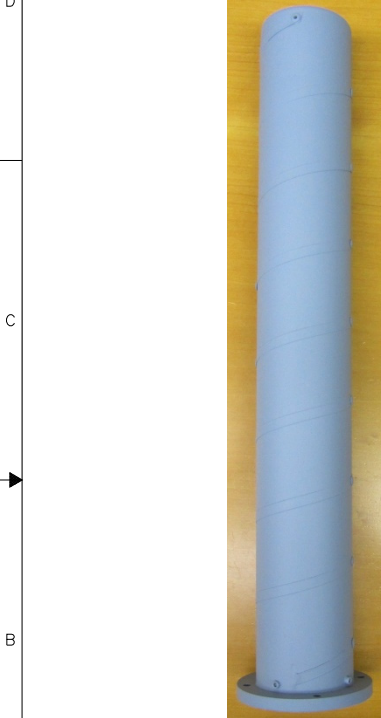

HIGH (in):	POLARIZATION:	LNA:	CABLE'S LENGTH:	CONNECTOR:	COLOR:
LL: TX: LHCP, RX: LHCP	[A]: WITH +34 dB LNA	X: NO CABLE	S: SMA, P: PINS	-1: GLOSS WHITE #17925 PER FED-STD-595B	
LR: TX: LHCP, RX: RHCP		M: WITH MAG. MOUNT	M: MCK, MM: MMCX	-2: LUSTERLESS GRAY #36320 PER FED-STD-595B	
RL: TX: RHCP, RX: LHCP	P: WITHOUT LNA	#: CABLE LENGTH (IN)	N: N, NB: N-Bulkhead	-3: OLIVE DRAB GREEN #34031 PER FED-STD-595B	
RR: TX: RHCP, RX: RHCP		R: RIGHT ANGLE CON.	T: TNC, TB: TNC-Bulkhead	-4: LUSTERLESS BLACK #37038 PER FED-STD-595B	
R: RHCP					
L: LHCP					

P/N: 18x2.5H1215R-P-XS-1

SPECIFICATIONS

ELECTRICAL:

FREQUENCY (MHz):	L5 GPS E5, E5a, E5b, Galileo L5 IRNSS	L2 GPS B2 Compass	L2 GLONASS E6 Galileo B3 Compass	OmniSTAR / L-Band L6 Galileo B1 Compass	L1 GPS E1, E2 Galileo L1 IRNSS	L1 GLONASS
	1176.45 ± 12.0 MHz 1164.45 - 1219.14 MHz 1176.45 ± 15.0 MHz	1227.60 ± 12.0 MHz 1207.14 ± 10.0 MHz	1252.50 ± 7.5 MHz 1266.75 - 1290.75 MHz 1268.52 ± 10.0 MHz	1542.50 ± 14.0 MHz 1542.50 ± 5.0 MHz 1561.098 ± 10.0 MHz	1575.42 ± 15.0 MHz 1575.42 ± 17.0 MHz 1575.42 ± 12.0 MHz	1609.0 ± 7.0 MHz
GAIN (dBic) in FS	+ 11.5 dBic					
AXIAL RATIO (dB)	1 to 2					
RADIATION PATTERN:	HEMISPHERICAL					
POLARIZATION:	RHCP					
VSWR:	< 1.7 : 1					
POWER HANDLING:	200 watts					

MECHANICAL:

- SIZE: TOP DIA. = 2.50 in [63.50 mm], BASE DIA = 3.50 in[88.90 mm]
HEIGHT = 18 in. [457 mm]
- WEIGHT: 16.2 oz. (460 +/-10) grams
- FINISH: SKYDROL RESISTANT POLYURETHANE ENAMEL
BASE IRIDITE PER MIL-C-5541F TYPE II CLASS 1A
- COLOR: GLOSS WHITE #17925 PER FED-STD-595B
LUSTERLESS GRAY #36320 PER FED-STD-595B
OLIVE DRAB GREEN #34031 PER FED-STD-595B
LUSTERLESS BLACK #37038 PER FED-STD-595B
- MATERIAL: 6061-T6 ALUMINUM ALLOY BASE
COMPOSITE RADOME, IMPACT, ABRASION, UV, SOLVENT,
AND SKYDROL RESISTANCE, FIRE RETARDANT
- CONNECTOR: SMA-Female
(OPTION: TNC, TNC-Bulkhead, N, N-Bulkhead, BNC)

ENVIRONMENTAL:

- TEMPERATURE: -166 °F TO +248 °F [-110 °C TO +120 °C]
- ALTITUDE: 70,000 ft.
- VIBRATION: > 30 G's

FEDERAL & MILITARY SPECIFICATIONS:

DESIGN TO: FAA TSO-C144, DO-160D, DO-228, MIL-C-5541F,
MIL-E-5400, MIL-I-45208A, MIL-STD-810, AND SAE J1455

QUANTITY	DESCRIPTION	PART NO	FINISH	THRU NO
4	MOUNTING SCREW: (M5 Pan Head Phillips, 10mm)	90116A250	-	5
4	MOUNTING SCREW: (M5 Pan Head Phillips, 20mm)	90116A260	-	4
1			-	3
1			-	2
1			-	1
-1	DESCRIPTION	PART NO	FINISH	THRU NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		ANTCOM CORP. TORRANCE CALIFORNIA	
FRACTIONS: 1/64, 1/32, 1/16, 3/32, 1/8, 1/4	DECIMALS: 0.005, 0.010, 0.015, 0.020, 0.030, 0.040, 0.050, 0.060, 0.070, 0.080, 0.090, 0.100, 0.125, 0.150, 0.175, 0.200, 0.250, 0.300, 0.375, 0.400, 0.500, 0.600, 0.750, 0.875, 1.000	DRAWN: _____	
TOLERANCE 2-1/2 PER AMS Y14.5	ANGLES: ± 1°	CHECKED: _____	
REMOVE ALL BURRS	BREAK EXTERNAL EDGES .005 TO .015	ENGINEER: _____	
FILLET R. 1/32 TO 1/8	SOFTEN THREADS PER MIL-STD-8879	APPROVED: S. HUYNH	DATE: DEC-07-09
MACHINED SURFACES: \sqrt{R}	DO NOT SCALE DRAWING	SCALE: 1/1	SHEET 1 OF 1
DATE: _____	DRW NO: _____	CHK NO: _____	APP NO: _____
REP: _____	REV: _____	REV: _____	REV: _____