

GPS/Iridium Cavity Diplexer





Antcom's P/N: 789-Iridium-GPS-Filter

Size= 4.7inx3.4inx1.8in

Antenna Mounts/Adapters: <http://www.antcom.com/documents/catalogs/PeripheralAntennaProducts2.pdf>

ANTCOM CORPORATION . 367 Van Ness Way, Suite 602 . Torrance, CA 90501 . Tel: (310) 782-1076 . Fax: (310) 782-1086 . E-mail: antennas@antcom.com . <http://www.antcom.com>

Parameter	Unit	Specification	
		RX	TX
Center Frequency	MHz	1575	1617.5
Frequency Range	MHz	1565 – 1585	1609 – 1626
Insertion Loss	dB	1.0 max	
VSWR in BW	dB	1.5:1 max	
Attenuation	dB	30.0 min @ 1609 ~ 1626 MHz	30.0 min @ 1565 ~ 1585 MHz
Power	W	30 max	
In / Out Impedance	Ω	50	
Connector	-	SMA(f)	
Temperature Range	$^{\circ}\text{C}(\text{deg.})$	-25 ~ +75	

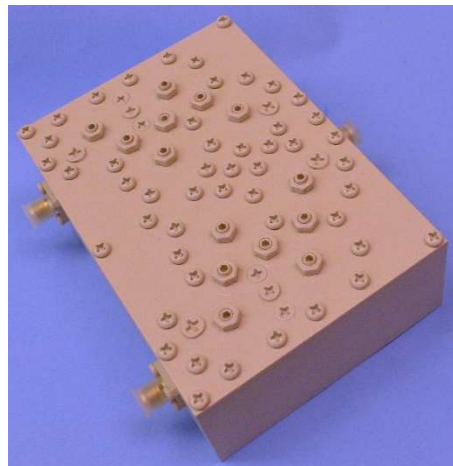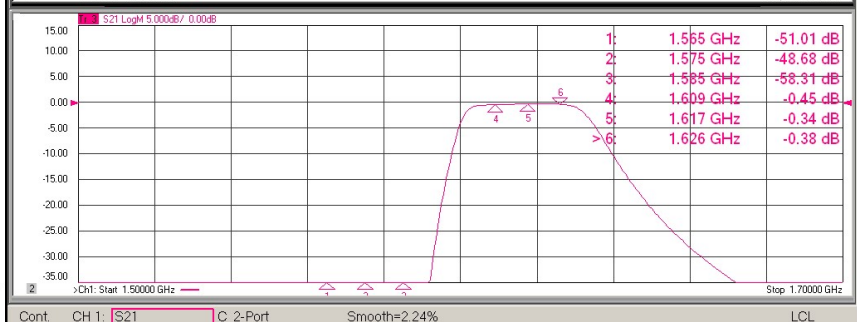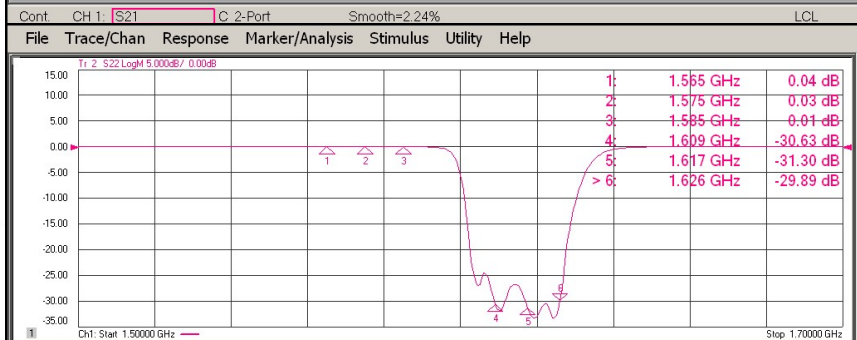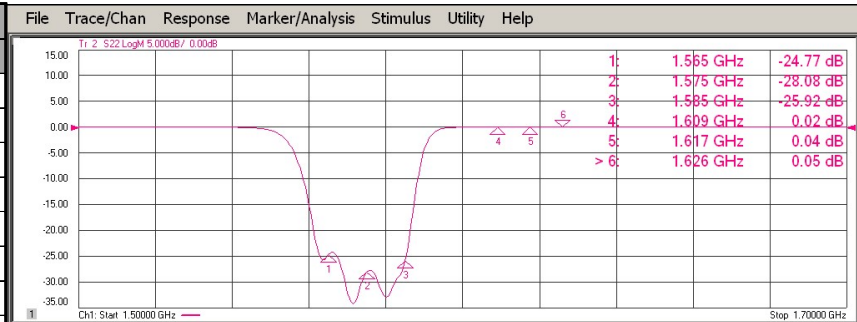

Unit: mm

